


DIRECT FET® AMPLIFIER FD 2.350

Ultra-compact 2 channel amplifier

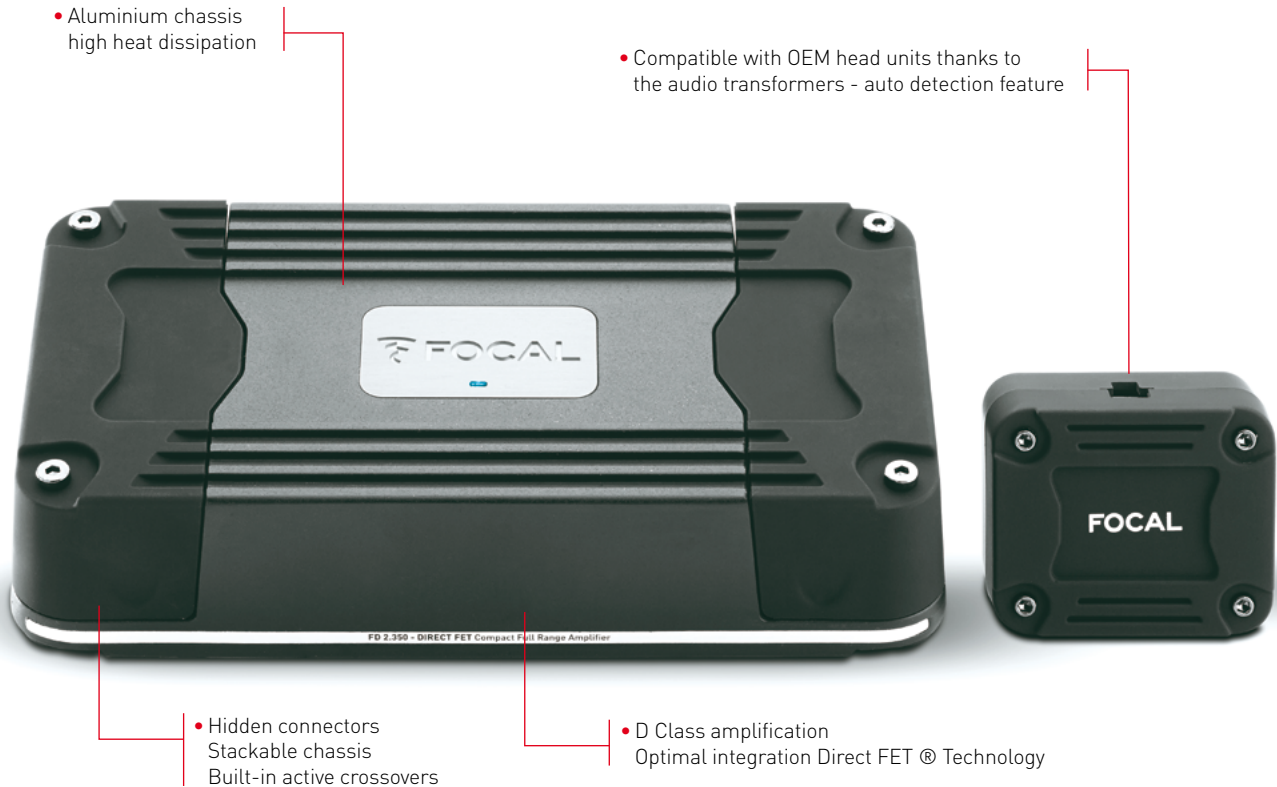

• Aluminium chassis
high heat dissipation

• Compatible with OEM head units thanks to
the audio transformers - auto detection feature

• Hidden connectors
Stackable chassis
Built-in active crossovers

• D Class amplification
Optimal integration Direct FET © Technology

KEY POINTS

- D Class – Direct Fet © Technology - Efficient heat dissipation and precision
- Stable under 2 Ohms
- Stackable aluminium chassis with high heat dissipation
- Low noise operational amplifiers New Japan Radio® NJM4580
- Low ESR capacitors - 105°C (220°F)
- Pseudo-balanced inputs
- Cable accessories included - easy to install



TECHNICAL SPECIFICATIONS



Stereo D Class bridgeable amplifier
High-level inputs with auto-detect / RCA
low-level inputs

CEA power (4 Ohms): 2x105 Watts RMS
Power max (2 Ohms): 2x170 Watts RMS

Power max (4 Ohms bridged): 1x360 Watts RMS
Configurable high-pass/low-pass crossover: 40Hz-400Hz
Full range mode
Bass boost (0-12dB)
Protections: Short circuit / low impedance / reversal of
polarity / DC / power drop / over heating protection

Dimensions (LxHxW):
7¹³/₁₆x4¹/₄x1¹¹/₁₆ (199x108x43mm)
Weight: 1.8 lbs

 **Performance**
CREATE YOUR SOUND

 **FOCAL**®
THE SPIRIT OF SOUND